

EXCEL T5

T5 batten fittings with high-frequency (HF) control gear



PRODUCT CODE	DESCRIPTION
BR114/T5	1x14W T5 HF Batten
BR124/T5	1x24W T5 HF Batten
BR128/T5	1x28W T5 HF Batten
BR135/T5	1x35W T5 HF Batten
BR149/T5	1x49W T5 HF Batten
BR154/T5	1x54W T5 HF Batten
BR180/T5	1x80W T5 HF Batten
BR224/T5	2x24W T5 HF Batten
BR228/T5	2x28W T5 HF Batten
BR235/T5	2x35W T5 HF Batten
BR249/T5	2x49W T5 HF Batten
BR254/T5	2x54W T5 HF Batten
BR280/T5	2x80W T5 HF Batten

For Emergency versions please add /EM to the end of the order code



Body same size as T12 and T8 batten making them ideal energy efficient replacements for older fittings

APPLICATIONS

- Garages and workshops
- Warehouses
- Store rooms
- Corridors and circulation areas

SPECIFICATION


- For T5 lamps. Supplied excluding lamps
- Supplied with HF control gear

CONSTRUCTION


- Robust steel body
- White gloss powder coated finish
- Polycarbonate end-caps

OPTIONS

- Full range of attachments available (see overleaf for details)
- Emergency (maintained 3 hours) versions available
- Dimming versions available. Ask for details

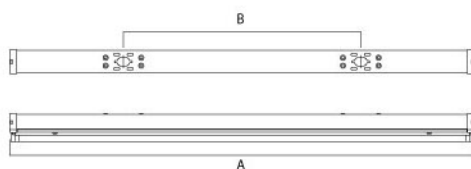

SIZE	A	B
14W/24W	575	417
28W/54W	1175	600
35W/49W	1475	600



61 SINGLE 61 TWIN

BATTENS

51